Air King Ventilation Products®

SPECIFICATIONS

ALICANTE™

RANGE HOODS

Barcelona® Collection Island Mounted Range Hood

500 CFM/11.0 SONES @ 0.10" WG. HVI CERTIFIED 120 Volts, 2.8 amps, 60 hz.

- **Dimensions**
  Dverall bottom projection - 235/8"
  Height (less chimney) - 111/16"
  Available widths: 36"
- **Hood Body**
  All metal cold rolled or stainless steel, finished in powder coat or brushed stainless steel.
- **Motor**
  3 speed, permanently split capacitor motor. Rated 120 volts, 60 hz., 2.8 amps.
- **Lighting**
  2 - fully enclosed 40 watt maximum candelabra bulbs.
- **Ducting Options**
  Vertical ducting:5" round duct adapter complete with polymetric back draft damper ensuring quiet operation.
  Ductless: Requiers charcoal filter (not included).
- **Blower Wheel**
  Dual inlet, electronically balanced polymetric centrifugal blower wheel, 527/32" width 59 paddles.
- **Mounting**
  Ceiling mounted with included mounting bracket. Install 20" to 30" from cooking surface.
- **Filters**
  Grease Filter: Dishwasher safe, BCGF-01 (included).
  Charcoal Filter: BCCF-01 (not included).
- **Available Finishes**
  White, Black & Stainless Steel.

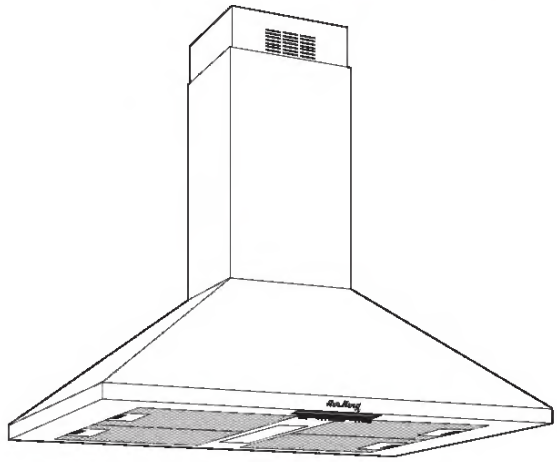

ALI SERIES



PERFORMANCE											
	Static Pressure (inches of w.g.)								*HVI Sones @ .1 SP*	*Fan Speed RPM*	*Power Watts*
	0	0.1	0.125	0.25	0.375	0.5	0.75	1.0			
Air Flow - CFM	508	500	498	488	477	465	440	413	11.0	2500	450

PROJECT		ARCHITECT	
LOCATION		ENGINEER	
CONTRACTOR		SUBMITTED BY	DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

2100 HVI CERTIFIED™

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Dntario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Downloaded from www.Manualslib.com manuals search engine